

Introducing the **SCUD SEED DRESSING MACHINES**



Which Seed Dressing Machine do you need?

The SCUD Innoculator

- **Peet based Inoculant and seed dressing**
- Petrol or 240v centrifugal pump, switch electric for centrifugal
- 100L or 150L calibrated tank
- Trolley mount
- Waterfold mixing
- Variable discharge ball valve
- On / Off ball valve
- 4m discharge hose
- Spray bar applicator
- Easy to clean out for product change over
- Lightweight and easy to move around

The SCUD Pickling Pot

- **Seed dressing only**
- 12v diaphragm pump
- 100L or 150L calibrated tank
- Skid mount or trolley mount
- 8m lead to reach ute or auger battery
- Variable discharge ball valve
- On / Off ball valve
- 4m discharge hose
- Spray bar applicator
- Easy to clean out for product change over
- Lightweight and easy to move around
- (The Pickling Pot is not to be used for peet based inoculant)

The SCUD Seed Dressing Machines gives farmers the flexibility to treat their seed as they need it.



The features of the SCUD Seed Dressing Machines




Spray Bar

The spray bar allows you to apply seed dressing through jets or an orifice plate using pressure to regulate the flow. Spray bar is not recommended to be used for peat based inoculant.



12v Pickling Pot

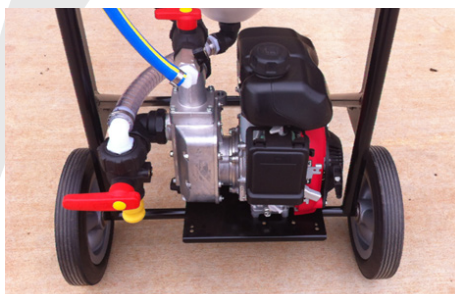

Petrol Inoculator



240v Inoculator

Self filling 3-way ball valve

The Inoculator and Pickling Pot come with a three way ball valve on the inlet that allows the machine to fill itself. All you need is a 1" hose from a water source (fire fighter/empty shuttle), this also enables quick and easy clean out and flushing between tanks. You can also flush the pump/outlet hose with clean water while leaving left over product in the tank.

Contact for more info

